

## WATER TREATMENT SOLUTION

### DESCRIPTION

DYNASPHER SK70-WT is gel strong acid cation exchange resin, supplied in sodium form. It is a copolymer of styrene and DVB with sulphonic acid exchange groups. It has excellent physical and chemical properties, high operating capacity, lower pressure drop, well physical and chemical stability. Its matrix promotes better kinetics and better diffusion rates into and out of the beads. It is used for water softening and demineralization

### SYSTEM DESIGN

Co - current / Counter current / Floating bed / Blocked bed

### PRINCIPAL APPLICATIONS

- Water softening
- Water demineralization
- Food
- Pharmaceutical
- Metallurgical industry

### REGULATORY

- F.D.A. – CFR 21 – 173.25
- Codes Alimentarius – Inventory of Processing Aids – CAC/MISC3
- European Resolution AP (97) – 1 regarding the TOC (Total Organic Carbon) released according AFNOR method (method T90 – 601)

### TYPICAL PACKAGING

- 1 ft<sup>3</sup> Sack
- 25 lt Sack
- 5 ft<sup>3</sup> Drum (Fiber)
- 1 m<sup>3</sup> Supersack
- 42 ft<sup>3</sup> Supersack



PRODUCT INFORMATION  
**DYNASHER SK70-WT**  
STRONG ACID GEL CATION RESIN

## TYPICAL CHARACTERISTICS

### PHYSICAL CHARACTERISTICS

Copolymer	Polystyrene Crosslinked-DVB
Matrix	Gel
Type	Strong acid
Functional Group	Sulphonic SO <sub>3</sub> H
Physical Form	Yellowish brown transparent spherical beads

### CHEMICAL CHARACTERISTICS

Ionic Form as Shipped	Na <sup>+</sup>
Total Exchange Capacity	≥ 1.9 eq/lit
Water Retention	45.0 - 50.0 %

### PARTICLE SIZE

Particle Diameter	0.315 - 1.250 mm
Uniformity Coefficient	≤ 1.5
< 300 µm	≤ 0.5 %
> 1180 µm	≤ 1.0 %

### STABILITY

Whole Uncracked Beads	≥ 98 %
Swelling	Na <sup>+</sup> → H <sup>+</sup> +5% max

### DENSITY

Particle Density	1.24 - 1.28 g/ml
Shipping Weight	800 - 850 g/lit

For additional size information, please refer to our Technical Dept.

### SUGGESTED OPERATING CONDITIONS

Temperature Range (Na <sup>+</sup> Form)	5 - 120° C (41 - 302° F)
pH Range	0 - 14
pH Stability	0 - 14

For additional particle size information regarding recommended minimum bed depth, operating conditions, and regeneration conditions for Layered or Mixed bed, please refer to our technical dept.

# PRODUCT INFORMATION

## DYNASPHER SK70-WT



### STRONGLY ACID GEL CATION RESIN

## HYDRAULIC CHARACTERISTIC

Estimated bed expansion of DYNASPHER SK70-WT as a function of backwash flowrate and temperature is show in figure 1.

Estimated pressure drop for DYNASPHER SK70-WT as a function of service flowrate and temperature is show in figure 2.

These pressure drop expectations are valid at the start of the service run with clean water and well – classified bed.

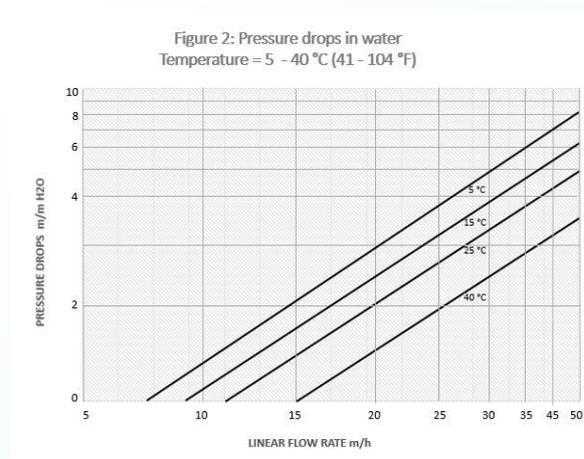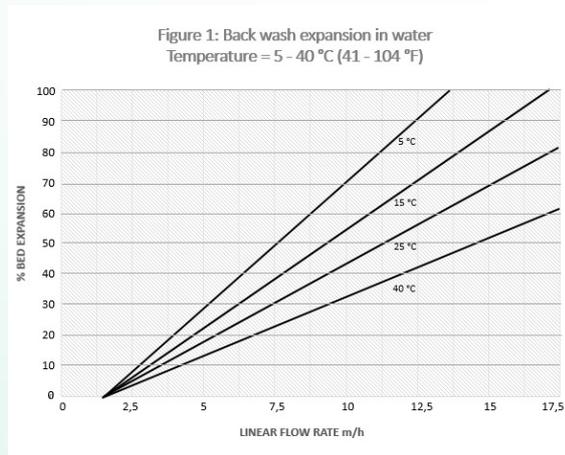

## CUSTOMER NOTICE

### STORAGE

It is recommended to store ion exchange resins at temperatures above the freezing point of water under roof in dry conditions without exposure to direct sunlight. If resin should become frozen, it should not be mechanically handled and left to thaw out gradually at ambient temperature. It must be completely thawed before handling or use. No attempt should be made to accelerate the thawing process.

### DISPOSAL

In the European Community Ion exchange resins have to be disposed, according to the European waste nomenclature which can be accessed on the internet – site of the European Union.

### TOXICITY

The safety data sheet must be observed. It contains additional data on product description, transport, storage, handling, safety and ecology.

### WARNING

Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.